# High Speed Oven

| Project           |
|-------------------|
| Item              |
| Quantity          |
| CSI Section 11400 |
| 25. 500           |
| Approved          |
| Date              |

# Merrychef conneX® 16

## Stainless steel



## Carbon black



## Features

- The conneX®16 is the most versatile, high speed oven on the market.
- An all-in-one unit ideally suited to rapidly cook, toast, grill and reheat fresh or frozen food, eliminating the need for other appliances.
- Cooking up to 20x faster than other cooking methods it can provide hot food on demand.
- It has the largest cavity 40.5cm x 40.5cm (16" x 16") to oven width 45.5cm (18") ratio, and fits on a 700mm worktop, perfect when space is at a premium.
- Suitable for front-of-house, operating quietly and easy to install due to ventless cooking capabilities through a built-in catalytic converter, eliminates the need for an extraction fan.
- Cool to touch exterior makes it safe to locate anywhere with no need to allow space around the unit.
- Easy to operate with a 7" HD widescreen display and new generation easyTouch®2.0, icon driven controller, ensuring consistent, high quality dishes.
- Stainless steel cavity and casework, with a sealed rounded edged cavity makes it easy to clean.

- Patented easy access front mounted monitored air filter.
- Wi-fi/ethernet connected with access to KitchenConnect cloud for easy menu updates (or, via a USB memory stick).

## **Options**

Stainless steel or carbon black finishes. Highly robust glass surrounds the easyTouch® 2.0 controller.

## Included accessories

1errychef conneX° 16

- Flat cook plate.
- Guarded hand paddle with supporting side walls.
- Cooking tray, full size.
- Cool down pan.
- Cook plate liner.

For a wide range of accessories recommended to get greater flexibility out of the conneX®16 and significantly reduce cleaning time visit

www.merrychef.com/products/ accessories

# Specifications

High speed Technology® combines three heat technologies:

- -Microwave
- -Convection
- -Tuned impingement.

## MICROWAVE POWER

- Microwave setting options: Off and 5-100% in 1% increments.
- Microwave distribution system uses a rotating active antenna to ensure even heating throughout the food.

#### **CONVECTED HEAT**


- Temperature setting options: Off and 212°F (100°C) to 527°F (275°C) in 1°C increments.
- The Heat distribution system is via Tuned Impingement, ensuring the most even browning.

#### **VENTILATION**

- Ventless certification. EPA 202 tested (8 hr).
- Internal catalytic filtration to limit grease and odour emissions.

## easyTouch® 2.0 CONTROL SYSTEM

- Icon driven, HD colour touch screen control panel with unlimited storage for multi-stage cooking profiles.
- Each cooking profile offers up to six (6) stages with programmable cooking times, microwave power settings and written and/or pictorial user instructions for each stage.
- Self diagnostics capability to monitor components.
- Easy menu updates or data transfer via USB memory stick and KitchenConnect cloud.




#### **HOW IT WORKS**

The convection fan pulls air in through the back of the cavity (1). This is then heated and returned to the cavity through the catalytic converters (2) and impinger plate (3) to produce an even heat pattern in the oven. This heat pattern allows food to cook evenly and produces a crisp golden finish, every time.







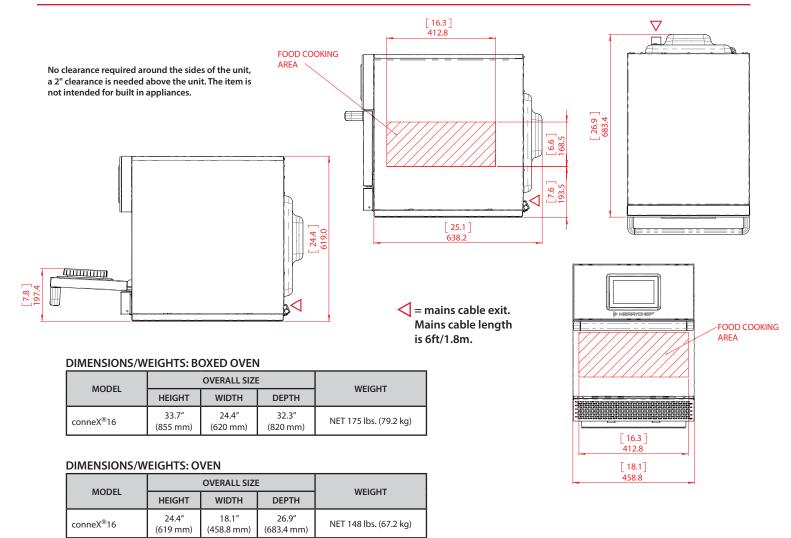

## **POWER REQUIREMENTS & OUTPUT**

\*This is not consumption. \*\*This is approx. microwave power output.

|               |                  | Finish             | ELECTRICAL SUPPLY |           |                                   |               |               |                                     |                     | POWER OUTPUT (APPROX.)           |                   |                      |
|---------------|------------------|--------------------|-------------------|-----------|-----------------------------------|---------------|---------------|-------------------------------------|---------------------|----------------------------------|-------------------|----------------------|
| Model         | Model number     |                    | Voltage           | Frequency | Arrangement<br>and<br>connections | Plug Type     | Plug<br>image | Plug<br>phase<br>current<br>rating* | Max. power<br>input | Microwave**<br>(IEC 705)<br>100% | Convected<br>heat | Combination<br>mode  |
|               | X16SBMV5HEL1CLEU | Stainless<br>steel | 220-230V          | 50Hz      | Single Phase<br>L1+N+E            | IEC 309 3 Pin | $\odot$       | 32A                                 | 6000 W              | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |
|               | X16SBMV5BDL1CLEU |                    | 380-400V          | 50Hz      | Twin Phase<br>L1+L2+N+E           | IEC 309 5 Pin | $\bigcirc$    | 16A                                 | 2500 W +<br>3300 W  | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |
| conneX16®     | X16SBMV5GCL1CLEU |                    | 380-400V          | 50Hz      | Twin Phase<br>L1+L2+N+E           | IEC 309 5 Pin | $\bigcirc$    | 32A                                 | 2500 W +<br>3300 W  | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |
| high<br>power | X16SBMV5HEL1BKEU |                    | 220-230V          | 50Hz      | Single Phase<br>L1+N+E            | IEC 309 3 Pin | $\odot$       | 32A                                 | 6000 W              | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |
|               | X16SBMV5BDL1BKEU | Carbon<br>black    | 380-400V          | 50Hz      | Twin Phase<br>L1+L2+N+E           | IEC 309 5 Pin | $\bigcirc$    | 16A                                 | 2500 W +<br>3300 W  | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |
|               | X16SBMV5GCL1BKEU |                    | 380-400V          | 50Hz      | Twin Phase<br>L1+L2+N+E           | IEC 309 5 Pin | $\bigcirc$    | 32A                                 | 2500 W +<br>3300 W  | 2000 W                           | 3200 W            | 2000 W**<br>+ 3200 W |

Merrychef recommend installing a Type D circuit breaker whilst remaining in accordance with local regulations.



Connex16 (EMEA) ENGLISH 020322