

# High Speed Oven

eikon® e1s

## Merrychef eikon® e1s



### Standard Features

- Rapid Cooking Technology combines three heat technologies:
  - Tuned Impingement
  - Microwave
  - Convection
- Ventless cooking capabilities through built-in catalytic converter
- Rapid cooking up to 10-12 times faster than a conventional oven
- 31cm x 31cm (12" x 12") cavity in a 41cm (16") width footprint
- Cool-to-touch exterior
- easyTouch®, icon driven touchscreen user interface
- Very easy to clean with large rounded edges
- Quiet operation – 52 dbA in standby mode
- USB memory stick data transfer of up to 1024 cooking profiles
- Built-in diagnostic testing
- Fits on a 50cm (19.7") worktop and no need for side installation space.
- Black exterior on stainless steel
- Soft edge front design

### Accessories


- Solid cookplate
- Cook plate liner
- Guarded paddle with supporting side walls
- Solid base basket
- Other accessories by request

### Specifications

The eikon® e1s is the first choice for anyone who wants to prepare fresh, hot food on demand where space is at a premium.

The eikon® e1s is the ideal way to cook, toast, grill, bake and regenerate a wide range of fresh or frozen foods, such as sandwiches, pastries, pizzas, fish, vegetables and meat.

One standard eikon® e1s unit runs off a standard domestic 13A-16A supply.

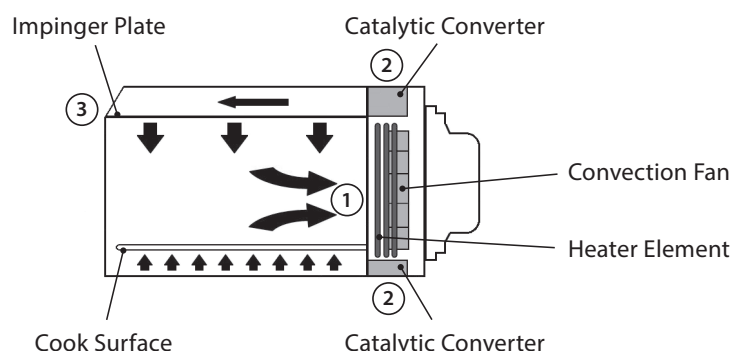

#### HOW IT WORKS

The convection fan pulls air in through the fan inlet (1). This is then heated and returned to the cavity through the catalytic converters (2) and impinger plate (3) to produce an even heat pattern in the oven. This heat pattern allows food to cook evenly and produces a crisp golden finish, everytime.



**INCLUDED ACCESSORIES**

- Solid cook plate
- Paddle with supporting side walls
- Cook plate liner
- Solid base basket

**CONSTRUCTION**


- Stainless steel cavity and casework (Painted)

**MICROWAVE POWER**

- Microwave settings, off or 5–100% in 1% increments

**CONVECTED HEAT**

- Temperature settings OFF and from 100°C to 260°C / 212°F to 500°F in 1°C steps

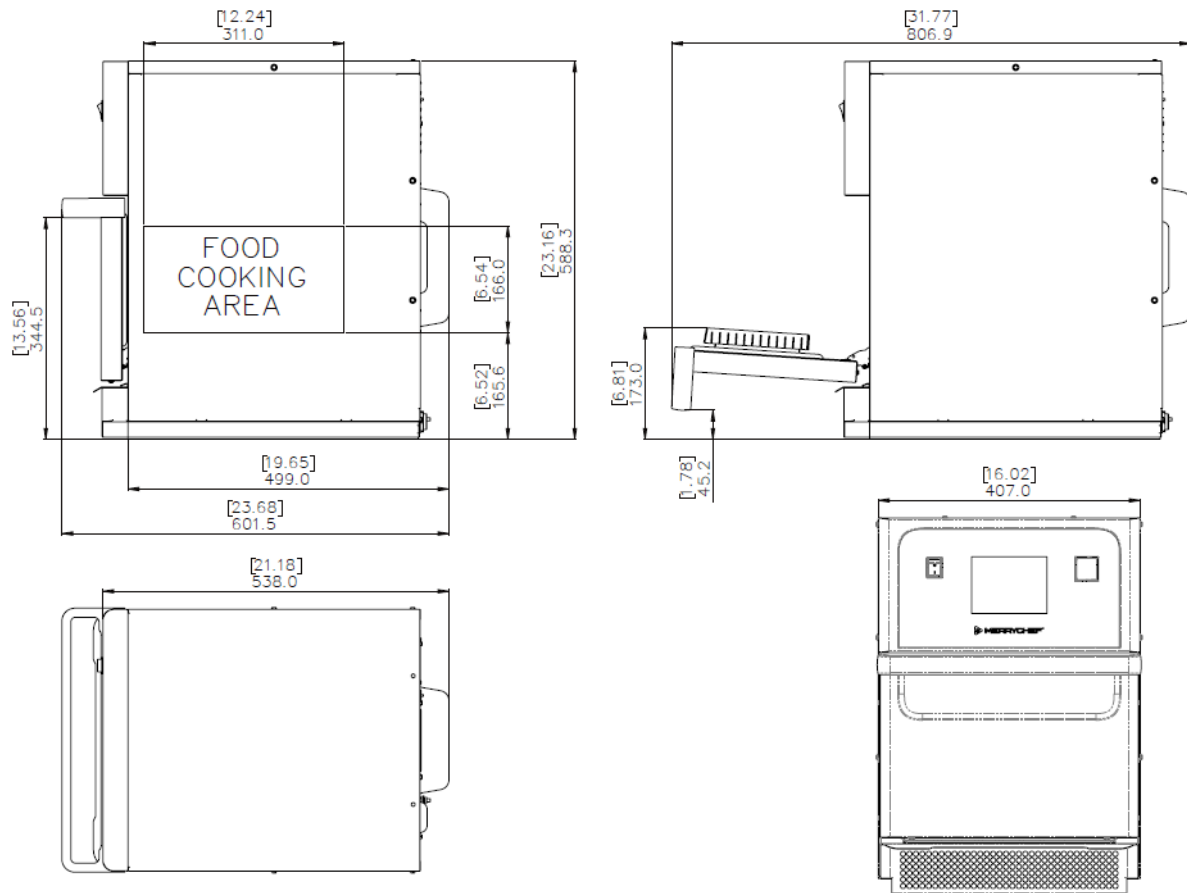
**DIMENSIONS**

MODEL	OVERALL SIZE			WEIGHT
	HEIGHT	WIDTH	DEPTH	
eikon® e1s	588 mm (23.2")	407 mm (16.0")	538 mm (21.2")	NET 46.0 kg (102 lbs) GROSS 56.0 kg (124 lbs)

**POWER REQUIREMENTS & OUTPUT**
**Merrychef eikon e1s**

Country / Region (examples)	Voltage	Arrangement	Connections Used	Plug Current Rating per Phase*	Max. Power Input	POWER OUTPUT (APPROX.)		
						Microwave** (IEC 705) 100%	Convected Heat	Combination Mode
LA	1N~ 208-240 V 60 Hz	Single Phase	L + N + E	15 A	2990 W	800W	2200 W	800 W** + 900 W
AR	1N~ 200-230 V 50 Hz	Single Phase	L + N + E	15 A	2990 W	800W	2200 W	800 W** + 900 W
CL	1N~ 200-230 V 50 Hz	Single Phase	L + N + E	16 A	2990 W	800W	2200 W	800 W** + 900 W
BR	1N~ 208-240 V 60 Hz	Single Phase	L + N + E	20 A	2990 W	800W	2200 W	800 W** + 900 W

\* This is not consumption. \*\* This is approx. microwave power output.



eikon® e1s

Part Number 32Z3965 Issue 4 ENG-GBR 03/18. © 2018 Welbilt UK Ltd. We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

**Welbilt UK Limited,**  
Ashbourne House, The Guildway,  
Old Portsmouth Road,  
Guildford, GU3 1LR, United Kingdom

Tel: +44(0)1483 464900  
Fax: +44(0)1483 464905

[www.welbilt.com](http://www.welbilt.com)  
[www.merrychef.com](http://www.merrychef.com)

